

PLDO

- > Circular Displacement
- > Low Impulse
- > Circular Duct Connection

DESCRIPTION

The PLDO offers a ventilation and cooling solution for large internal spaces. Suited to large scale applications, the unit is available in six sizes each with a removable front panel.

Fixing:

Circular duct connection on top, with rubber seal. Can be wall or floor mounted.

CONSTRUCTION

1.5 mm galvanised sheet steel

Finish:

Standard white powder coated external finish

Options:


- Duct connection from above
- Support legs
- Smooth duct connection
- Bottom connection (requires base frame and table top)

MODELS/CONNECTION

- PLDO 12:** 120 mm Duct
PLDO 16: 160 mm Duct
PLDO 20: 200 mm Duct
PLDO 25: 250 mm Duct
PLDO 31: 310 mm Duct
PLDO 40: 400 mm Duct

ACCESSORIES

- MLC Attenuated measuring damper (12-31)
 SDO Base frame (70 mm)

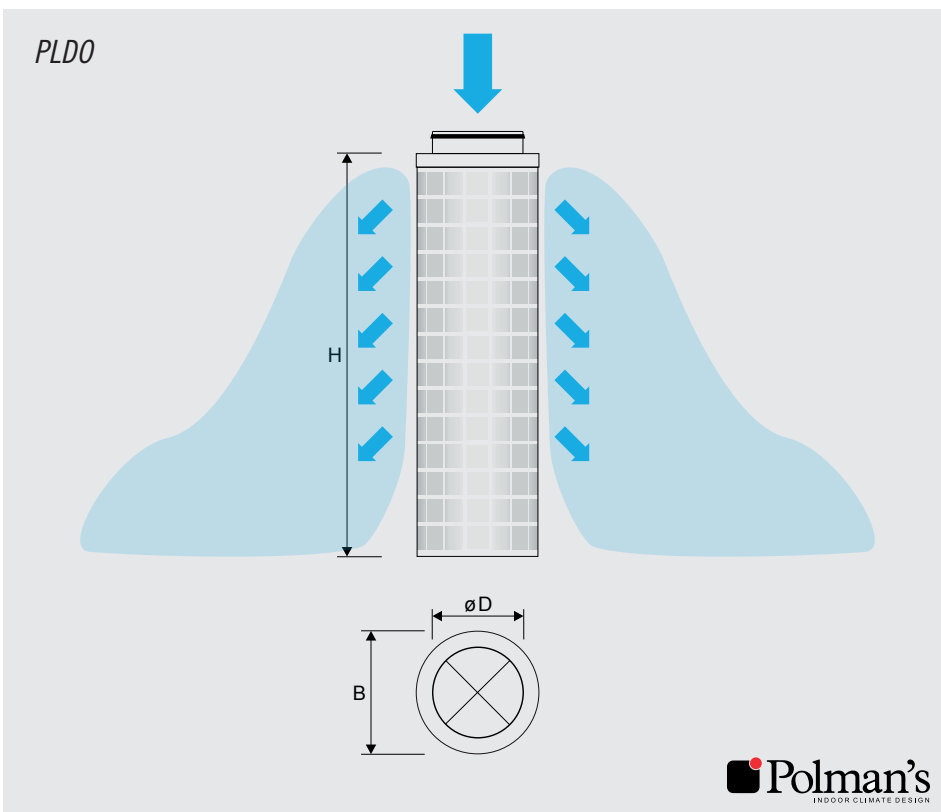

DIMENSIONS (mm)				
	B	$\varnothing D$	H	Kg
12	198	124	650	7
16	234	159	650	8
20	271	199	890	10
25	329	249	890	13
31	386	314	1250	18
40	463	399	1550	20

K-FACTOR					
	12	16	20	25	31
K	10.7	19.8	26.8	49.6	78

NOTES

All dimensions are given in mm.